



knürr
World of control rooms

CONTROL ROOM SOLUTIONS BOOK

2026/EN-V3

KNÜRR DACOBAS® SYSTEM TABLES

128 to 148



Knürr Dacobas®-System tables

Strong points

Office organisation and technical integration are enabled with a wide range of individual, configurable desk pedestals.

- 1** Desks are afforded a high load rating with a strong (50 mm) steel frame and a postformed desktop (70 mm).
- 2** The patented quick connect system guarantees simple and strong link-up of desk, cabinet and corner elements.
- 3** Tapped thread in the top end of the extrusion allows adapters to be mounted for practical accessories.
- 4** Additional work and storage surfaces are created with desktop superstructures. A simple plug/screw connection enables vertical link-up for workstation superstructures, e.g. a second working level or lighting fixtures.
- 5** Cable Routing Set (CRS)
Quick and easy cabling with the cable routing set in the vertical cable duct under the worktop.

All workstations are also available in ESD version as required.



1

DAC00251



2

DAC00262



3

DAC00259



4

DAC00387



5

DAC20184

Dimensions in mm:		W = Width	HU = Standard height unit, 1 HU = 44.45 mm
	H = Height	D = Depth	19" = 482.6 mm, (ideal for 19" components in acc. with DIN 41494)
	h = Installation height	d = Useful depth	UP = Unit of packaging
	L = Length		
Conversion:		1 inch = 25.4 mm	Replace „x“ with the number of your color choice

Knürr Dacobas® System tables Technical data

• Material / Finish

- Desk frame, sheet steel, zinc passivated
- Three layer particle board, FP/Y E1 version, fire protection class B 2
- Worktop covered with high pressure plastic laminate
- Desk legs, extruded aluminium, powder-coated texture
- Cover panels, three layer particle board, FP/Y E1 version, directly coated, fire protection class B2
- Drawer trims and drawer handles, plastic (PS)

• Color

Final digit of order number .1:

- Worktop: light-grey (similar RAL 7035)
- Legs: RAL 5008, grey blue
- Cover panels, drawer trims and drawer handles: light-grey

• Load rating

- Tested static surface load, 1500 N

• Standards

- DIN 68761 for worktops
- EN 438 HGS class for high pressure plastic laminate

• Note

- Please order socket strip separately

• How supplied

- Knürr Dacobas® desks and combi desks are fully assembled
- Knürr Dacobas® add-on desks are supplied separately in modules



DAC20186

INFO

Please Note:

Further surface/color combination on request.

E.g.: Profiles RAL 7021 (dark grey) combined with maple or beech worktops.

Please ask for details!

SPACE MANAGEMENT MADE EASY!

Four basic modules enable room layouts for the most diverse applications:

A Knürr Dacobas® Combi Desk 19"

Pedestal


B Knürr Dacobas® Trapezoid Corner

**C Knürr Dacobas® Combi Desk with
Office Pedestal**

D Knürr Dacobas® Superstructure


E Knürr Dacobas® Rear Panel

F Knürr Dacobas® Plexiglas Doors

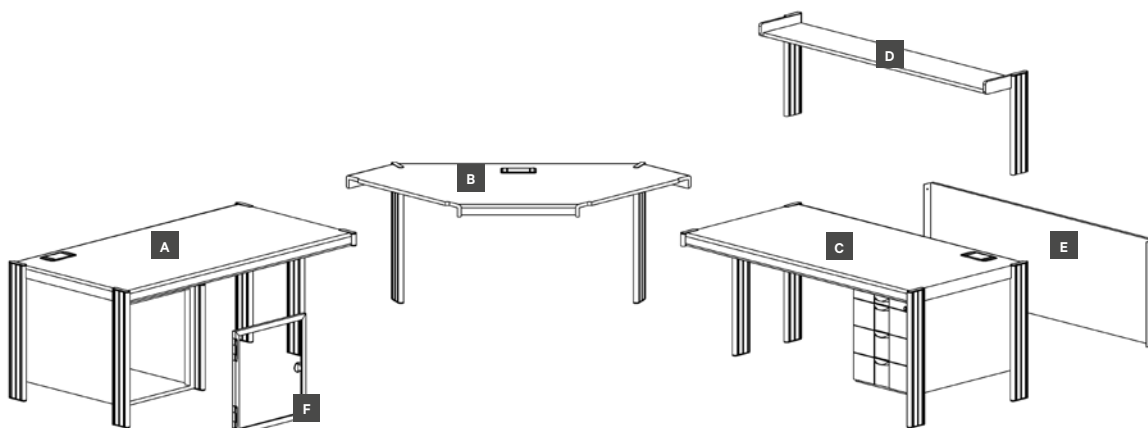


Knürr Dacobas®- End side panel

W	H	Order no.	UP
750		01.300.200.1	1 unit




Knürr Dacobas®- Interlinking side panel

W	H	Order no.	UP
750		01.300.201.1	1 unit



Knürr Dacobas®- Working level for add-on channel MD *only in connection with add-on channel

W	D	Order no.	Order no. (ESD)	UP
630	670	01.300.210.1	01.300.230.1	1 unit
830	670	01.300.211.1	01.300.231.1	1 unit
1030	670	01.300.212.1	01.300.232.1	1 unit
1230	670	01.300.213.1	01.300.233.1	1 unit
1430	670	01.300.214.1	01.300.234.1	1 unit
1630	670	01.300.215.1	01.300.235.1	1 unit
1830	670	01.300.216.1	01.300.236.1	1 unit
2030	670	01.300.217.1	01.300.237.1	1 unit
630	870	01.300.220.1	01.300.240.1	1 unit
830	870	01.300.221.1	01.300.241.1	1 unit
1030	870	01.300.222.1	01.300.242.1	1 unit
1230	870	01.300.223.1	01.300.243.1	1 unit
1430	870	01.300.224.1	01.300.244.1	1 unit
1630	870	01.300.225.1	01.300.245.1	1 unit
1830	870	01.300.226.1	01.300.246.1	1 unit
2030	870	01.300.227.1	01.300.247.1	1 unit



Knürr Dacobas®- Surface-mounted tray MD horizontal

W	H	D	Order no.	UP
630			01.300.280.1	1 unit
830			01.300.281.1	1 unit
1030			01.300.282.1	1 unit
1230			01.300.283.1	1 unit
1430			01.300.284.1	1 unit
1630			01.300.285.1	1 unit
1830			01.300.286.1	1 unit
2030			01.300.287.1	1 unit
570			01.300.290.1	1 unit
1140			01.300.291.1	1 unit
1710			01.300.292.1	1 unit
Shortened 19" rear panel for trunking 1x per 19" substructure (for W 570 / 1140 / 1710)				01.300.293.1 1 set



Dimensions in mm: W = Width
 H = Height
 D = Depth
 h = Installation height
 d = Useful depth
 L = Length


HU = Standard height unit, 1 HU = 44.45 mm
 19" = 482.6 mm, (ideal for 19" components in acc. with DIN 41494)
 UP = Unit of packaging

Conversion: 1 inch = 25.4 mm
 Replace „x“ with the number of your color choice

Knürr Dacobas® - 19" substructure

- 12U 19" substructure
- Removable side panels
- Rear panel with ventilation gills
- 4x 12U 19" T-slot profile

W	H	D (mm)	ET (mm)	Order no.	UP
19"	12 HU	670	566,5	01.321.095.1	1 Stk.
19"	12HU	870	766,5	01.321.097.1	1 Stk.

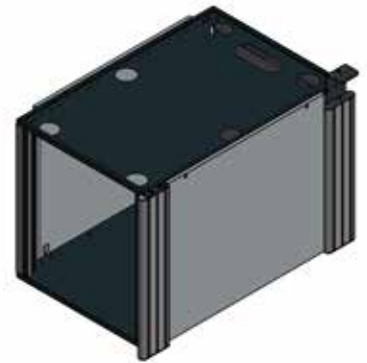

Knürr Dacobas® - Vertical duct

- Vertical cable duct for rear installation on the Dacobas profile
- With side brush strip for easy cable insertion
- Secure and concealed cable routing
- Top with E-set for wiring into the rear horizontal KV trunking
- **Color**
 - RAL 5008 grey blue

W	H	Order no.	UP
-	750	01.300.295.1	1 unit



Knürr Dacobas® - Shortened 19" rear panel for trunking + IM Profile

- 1x per 19" substructure (for W 570 / 1140 / 1710)

W	Order no.	UP
570 / 1140 / 1710	01.300.293.1	1 unit



Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44,45 mm
19" = 482,6 mm, (ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging

Conversion: 1 inch = 25,4 mm


Replace „x“ with the number of your color choice

- **Basic desk**

- Basic desk with 4 legs

- **Model**

- Without pedestal
- With lockable office pedestal, left or right
- Drawer height, 3 x 150 mm or 1 x 150 mm, 1 x 300 mm with suspension frame
- With 1 utility extension

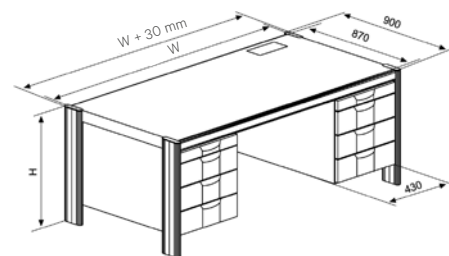

DAC00307

Knürr Dacobas® Desk

With / without office pedestal, depth 870 mm


W	H	D	CRS	ESD	Pedestal	Order no.	UP
1140	720	870	•		Without	01.300.100.1	1 unit
1710	720	870	•		Without	01.300.101.1	1 unit
570	750	870	•		Without	01.300.105.1	1 unit
1140	750	870	•		Without	01.300.102.1	1 unit
1710	750	870	•		Without	01.300.103.1	1 unit
570	720	870			Without	01.300.004.1	1 unit

W	H	D	CRS	ESD	Pedestal	Order no.	UP
1140	720	870	•		3 x 150 mm, left	01.317.083.1	1 unit
1710	720	870	•		3 x 150 mm, left	01.317.055.1	1 unit
1140	750	870	•		3 x 150 mm, left	01.317.583.1	1 unit
1710	750	870	•		3 x 150 mm, left	01.317.555.1	1 unit
1140	750	870			3 x 150 mm, left	01.317.533.1	1 unit
1710	750	870			3 x 150 mm, left	01.317.505.1	1 unit
1140	750	870		•	3 x 150 mm, left	01.363.533.1	1 unit
1710	750	870		•	3 x 150 mm, left	01.363.505.1	1 unit


W	H	D	CRS	ESD	Pedestal	Order no.	UP
1140	720	870	•		3 x 150 mm, right	01.317.082.1	1 unit
1710	720	870	•		3 x 150 mm, right	01.317.056.1	1 unit
1140	750	870	•		3 x 150 mm, right	01.317.582.1	1 unit
1710	750	870	•		3 x 150 mm, right	01.317.556.1	1 unit
1140	750	870			3 x 150 mm, right	01.317.532.1	1 unit
1710	750	870			3 x 150 mm, right	01.317.506.1	1 unit
1140	750	870		•	3 x 150 mm, right	01.363.532.1	1 unit
1710	750	870		•	3 x 150 mm, right	01.363.506.1	1 unit

W	H	D	CRS	ESD	Pedestal	Order no.	UP
1140	720	870	•		150 + 300 mm, left	01.317.081.1	1 unit
1710	720	870	•		150 + 300 mm, left	01.317.058.1	1 unit
1140	750	870	•		150 + 300 mm, left	01.317.581.1	1 unit
1710	750	870	•		150 + 300 mm, left	01.317.558.1	1 unit
1140	750	870			150 + 300 mm, left	01.317.531.1	1 unit
1710	750	870			150 + 300 mm, left	01.317.508.1	1 unit
1140	750	870		•	150 + 300 mm, left	01.363.531.1	1 unit
1710	750	870		•	150 + 300 mm, left	01.363.508.1	1 unit


W	H	D	CRS	ESD	Pedestal	Order no.	UP
1140	720	870	•		150 + 300 mm, right	01.317.080.1	1 unit
1710	720	870	•		150 + 300 mm, right	01.317.059.1	1 unit
1140	750	870	•		150 + 300 mm, right	01.317.580.1	1 unit
1710	750	870	•		150 + 300 mm, right	01.317.559.1	1 unit
1140	750	870			150 + 300 mm, right	01.317.530.1	1 unit
1710	750	870			150 + 300 mm, right	01.317.509.1	1 unit
1140	750	870		•	150 + 300 mm, right	01.363.530.1	1 unit
1710	750	870		•	150 + 300 mm, right	01.363.509.1	1 unit




DAC20007




DAC20008



DAC20009



DAC20010




DAC20011

• Basic desk

- Basic desk with 4 legs

• Model


- With lockable office pedestal, left or right
- Drawer height, 3 x 150 mm or 1 x 150 mm, 1 x 300 mm with suspension frame
- With 1 utility extension

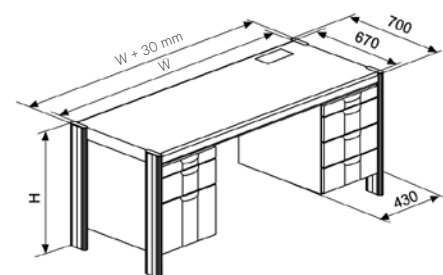

DAC00365


Knürr Dacobas® Desk With office pedestal, depth 670 mm

W	H	D	CRS	ESD	Pedestal	Order no.	UP
1140	720	670	•		3 x 150 mm, left	01.317.087.1	1 unit




DAC20042

W	H	D	CRS	ESD	Pedestal	Order no.	UP
1140	720	670	•		3 x 150 mm, right	01.317.086.1	1 unit




DAC20044

W	H	D	CRS	ESD	Pedestal	Order no.	UP
1140	720	670	•		150 + 300 mm, left	01.317.085.1	1 unit



DAC20046

W	H	D	CRS	ESD	Pedestal	Order no.	UP
1140	720	670	•		150 + 300 mm, right	01.317.084.1	1 unit




DAC20048

• Basic desk

- Basic desk with 4 legs

• Model

- Without pedestal
- With lockable office pedestal, left or right
- Drawer height, 3 x 150 mm or 1 x 150 mm, 1 x 300 mm with suspension frame
- With 1 utility extension

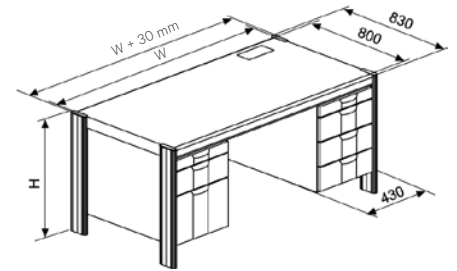


DAC00364

Knürr Dacobas® Desk


With / without office pedestal, depth 800 mm

W	H	D	CRS	Pedestal	Order no.	UP
1600	720	800		Without	01.311.081.1	1 unit




DAC20031

W	H	D	CRS	Pedestal	Order no.	UP
1200	720	800	•	3 x 150 mm, left	01.319.130.1	1 unit
1600	720	800	•	3 x 150 mm, left	01.319.115.1	1 unit




DAC20043

W	H	D	CRS	Pedestal	Order no.	UP
1200	720	800	•	3 x 150 mm, right	01.319.131.1	1 unit
1600	720	800	•	3 x 150 mm, right	01.319.116.1	1 unit




DAC20045

W	H	D	CRS	Pedestal	Order no.	UP
1200	720	800	•	150 + 300 mm, left	01.319.132.1	1 unit
1600	720	800	•	150 + 300 mm, left	01.319.117.1	1 unit



DAC20047

W	H	D	CRS	Pedestal	Order no.	UP
1200	720	800	•	150 + 300 mm, right	01.319.133.1	1 unit
1600	720	800	•	150 + 300 mm, right	01.319.118.1	1 unit



DAC20049


Dimensions in mm: W = Width
 H = Height
 D = Depth
 h = Installation height
 d = Useful depth
 L = Length

HU = Standard height unit, 1 HU = 44.45 mm
 19" = 482.6 mm, (ideal for 19" components in acc. with DIN 41494)
 UP = Unit of packaging

Conversion: 1 inch = 25.4 mm
 Replace „x“ with the number of your color choice

• Basic desk

- Basic desk with 4 legs
- 19" Pedestal, 12 HU in accordance with ICE 297
- Side panels removable
- Rear panel removable, with vent slots

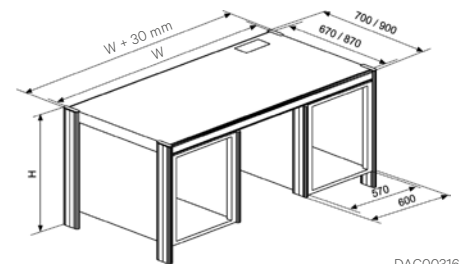

DAC00316

Knürr Dacobas® Desk With 19" office pedestal, depth 670 / 870 mm

W	H	D	CRS	Pedestal	Order no.	UP
570	750	670	•	Centre	01.304.108.1	1 unit
1140	750	670	•	Left	01.304.106.1	1 unit
1710	750	670	•	Left	01.304.110.1	1 unit


W	H	D	CRS	Pedestal	Order no.	UP
570	750	870	•	Centre	01.304.105.1	1 unit
1140	750	870	•	Left	01.304.103.1	1 unit
1710	750	870	•	Left	01.304.101.1	1 unit

W	H	D	CRS	Pedestal	Order no.	UP
1140	750	670	•	Right	01.304.107.1	1 unit
1710	750	670	•	Right	01.304.111.1	1 unit


W	H	D	CRS	Pedestal	Order no.	UP
1140	750	870	•	Right	01.304.104.1	1 unit
1710	750	870	•	Right	01.304.102.1	1 unit

W	H	D	CRS	Pedestal	Order no.	UP
1710	750	670	•	Left + right	01.304.109.1	1 unit


W	H	D	CRS	Pedestal	Order no.	UP
1710	750	870	•	Left + right	01.304.100.1	1 unit




DAC20012




DAC20033




DAC20034



DAC20013




DAC20014



DAC20066

• Combi desk

- Combi desk with 4 legs and link-up extrusion
- Offset leg to ensure unobstructed leg space

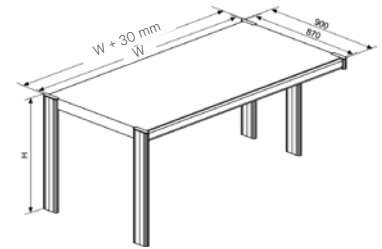


DAC20015

Knürr Dacobas® Combi Desk*

Without office pedestal, depth 870 mm

W	H	D	CRS	ESD	Pedestal/Link-up	Order no.	UP
570	750	870	•		Without, left	01.300.343.1	1 unit
1140	750	870	•		Without, left	01.300.345.1	1 unit
1710	750	870	•		Without, left	01.300.347.1	1 unit




DAC20015

W	H	D	CRS	ESD	Pedestal/Link-up	Order no.	UP
570	750	870	•		Without, right	01.300.344.1	1 unit
1140	750	870	•		Without, right	01.300.346.1	1 unit
1710	750	870	•		Without, right	01.300.348.1	1 unit



DAC20148

W	H	D	CRS	ESD	Pedestal/Link-up	Order no.	UP
570	750	870			Without, left	01.300.331.1	1 unit
1140	750	870			Without, left	01.300.333.1	1 unit
1710	750	870			Without, left	01.300.335.1	1 unit
570	750	870		•	Without, left	01.360.331.1	1 unit
1140	750	870		•	Without, left	01.360.333.1	1 unit
1710	750	870		•	Without, left	01.360.335.1	1 unit



DAC20015

W	H	D	CRS	ESD	Pedestal/Link-up	Order no.	UP
570	750	870			Without, right	01.300.332.1	1 unit
1140	750	870			Without, right	01.300.334.1	1 unit
1710	750	870			Without, right	01.300.336.1	1 unit
570	750	870	•		Without, right	01.360.332.1	1 unit
1140	750	870	•		Without, right	01.360.334.1	1 unit
1710	750	870	•		Without, right	01.360.336.1	1 unit



DAC20148

* Combi desk:
with offset extrusion in the combi range

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44.45 mm
19" = 482.6 mm,
(ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging

Conversion: 1 inch = 25.4 mm


Replace „x“ with the number of your color choice

• Combi desk

- Combi desk with 4 legs and link-up extrusion
- Offset leg to ensure unobstructed leg space
- With lockable office pedestal

• Model


- With office pedestal
- Drawer height, 3 x 150 mm or 1 x 150 mm, 1 x 300 mm with suspension frame
- With 1 utility extension

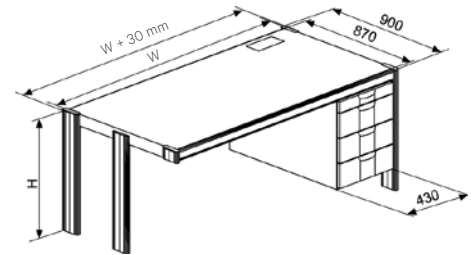

DAC00320


Knürr Dacobas® Combi Desk* With office pedestal, depth 870 mm

W	H	D	CRS	ESD	Pedestal/Link-up	Order no.	UP
1140	720	870	•		3 x 150 mm, left	01.317.341.1	1 unit
1710	720	870	•		3 x 150 mm, left	01.317.345.1	1 unit
1140	750	870	•		3 x 150 mm, left	01.317.841.1	1 unit
1710	750	870	•		3 x 150 mm, left	01.317.845.1	1 unit
1140	750	870			3 x 150 mm, left	01.317.825.1	1 unit
1710	750	870			3 x 150 mm, left	01.317.829.1	1 unit
1140	750	870		•	3 x 150 mm, left	01.363.825.1	1 unit
1710	750	870		•	3 x 150 mm, left	01.363.829.1	1 unit




DAC20051

W	H	D	CRS	ESD	Pedestal/Link-up	Order no.	UP
1140	720	870	•		3 x 150 mm, right	01.317.340.1	1 unit
1710	720	870	•		3 x 150 mm, right	01.317.344.1	1 unit
1140	750	870	•		3 x 150 mm, right	01.317.840.1	1 unit
1710	750	870	•		3 x 150 mm, right	01.317.844.1	1 unit
1140	750	870			3 x 150 mm, right	01.317.824.1	1 unit
1710	750	870			3 x 150 mm, right	01.317.828.1	1 unit
1140	750	870		•	3 x 150 mm, right	01.363.824.1	1 unit
1710	750	870		•	3 x 150 mm, right	01.363.828.1	1 unit




DAC20053

W	H	D	CRS	ESD	Pedestal/Link-up	Order no.	UP
1140	720	870	•		150 + 300 mm, left	01.317.343.1	1 unit
1710	720	870	•		150 + 300 mm, left	01.317.347.1	1 unit
1140	750	870	•		150 + 300 mm, left	01.317.843.1	1 unit
1710	750	870	•		150 + 300 mm, left	01.317.847.1	1 unit
1140	750	870			150 + 300 mm, left	01.317.827.1	1 unit
1710	750	870			150 + 300 mm, left	01.317.831.1	1 unit
1140	750	870		•	150 + 300 mm, left	01.363.827.1	1 unit
1710	750	870		•	150 + 300 mm, left	01.363.831.1	1 unit



DAC20055

W	H	D	CRS	ESD	Pedestal/Link-up	Order no.	UP
1140	720	870	•		150 + 300 mm, right	01.317.342.1	1 unit
1710	720	870	•		150 + 300 mm, right	01.317.346.1	1 unit
1140	750	870	•		150 + 300 mm, right	01.317.842.1	1 unit
1710	750	870	•		150 + 300 mm, right	01.317.846.1	1 unit
1140	750	870			150 + 300 mm, right	01.317.826.1	1 unit
1710	750	870			150 + 300 mm, right	01.317.830.1	1 unit
1140	750	870		•	150 + 300 mm, right	01.363.826.1	1 unit
1710	750	870		•	150 + 300 mm, right	01.363.830.1	1 unit



DAC20057


* Combi desk:
with offset extrusion in the combi range

• Combi desk

- Combi desk with 4 legs and link-up extrusion
- Offset leg to ensure unobstructed leg space
- With or without lockable office pedestal

• Model


- With office pedestal
- Drawer height, 3 x 150 mm or 1 x 150 mm, 1 x 300 mm with suspension frame
- With 1 utility extension

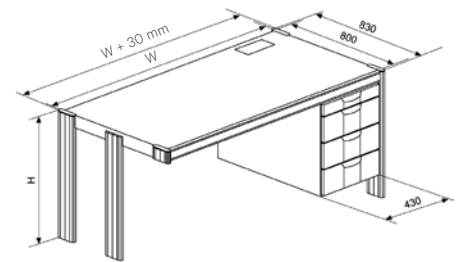

DAC00328


Knürr Dacobas® Combi Desk* With office pedestal, depth 800 mm

W	H	D	CRS	Pedestal / For linking	Order no.	UP
1200	720	800	•	3 x 150 mm, left	01.319.150.1	1 unit
1600	720	800	•	3 x 150 mm, left	01.319.145.1	1 unit




DAC20017

W	H	D	CRS	Pedestal / For linking	Order no.	UP
1200	720	800	•	3 x 150 mm, right	01.319.151.1	1 unit
1600	720	800	•	3 x 150 mm, right	01.319.146.1	1 unit




DAC20018

W	H	D	CRS	Pedestal / For linking	Order no.	UP
1200	720	800	•	150 + 300 mm, left	01.319.152.1	1 unit
1600	720	800	•	150 + 300 mm, left	01.319.147.1	1 unit



DAC20019

W	H	D	CRS	Pedestal / For linking	Order no.	UP
1200	720	800	•	150 + 300 mm, right	01.319.153.1	1 unit
1600	720	800	•	150 + 300 mm, right	01.319.148.1	1 unit




DAC20020

* Combi desk:
with offset extrusion in the combi range

Dimensions in mm:	W = Width H = Height D = Depth h = Installation height d = Useful depth L = Length	HU = Standard height unit, 1 HU = 44.45 mm 19" = 482.6 mm, (ideal for 19" components in acc. with DIN 41494) UP = Unit of packaging
Conversion:	1 inch = 25.4 mm	Replace „x“ with the number of your color choice

• Combi desk


- Combi desk with 4 legs and link-up extrusion
- Offset leg to ensure unobstructed leg space
- With 19" pedestal, 12 HU in accordance with ICE 297
- Side panels removable
- Rear panel removable, with vent slots
- 1 HU = 44.45 mm

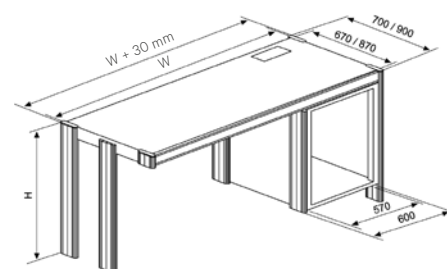

DAC00330


Knürr Dacobas® Combi Desk* With 19" office pedestal, depth 870 mm

W	H	D	CRS	Pedestal / For linking	Order no.	UP
1140	750	870	•	Left	01.304.315.1	1 unit
1710	750	870	•	Left	01.304.317.1	1 unit



DAC20021

W	H	D	CRS	Pedestal / For linking	Order no.	UP
1140	750	870	•	Right	01.304.314.1	1 unit
1710	750	870	•	Right	01.304.316.1	1 unit



DAC20140

* Combi desk:
with offset extrusion in the combi range

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44.45 mm
19" = 482.6 mm.
(ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging


Conversion: 1 inch = 25.4 mm
Replace „x“ with the number of your color choice

• Add-on desk

- Add-on desk with 2 legs
- With or without lockable office pedestal

• Model

- Without office pedestal
- With office pedestal
- Drawer height, 3 x 150 mm or 1 x 150 mm, 1 x 300 mm with suspension frame
- With 1 utility extension

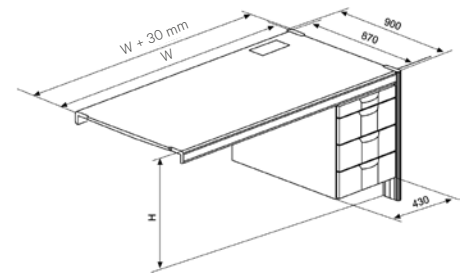


DAC00333

Knürr Dacobas® Add-On Desk*


With / without office pedestal, depth 870 mm

W	H	D	CRS	ESD	Pedestal / For add-on	Order no.	UP
570	750	870			Without, left or right	01.300.359.1	1 unit
1140	750	870			Without, left or right	01.300.360.1	1 unit
1710	750	870			Without, left or right	01.300.361.1	1 unit
570	750	870		•	Without, left or right	01.360.359.1	1 unit
1140	750	870		•	Without, left or right	01.360.360.1	1 unit
1710	750	870		•	Without, left or right	01.360.361.1	1 unit




DAC20141

W	H	D	CRS	ESD	Pedestal / For add-on	Order no.	UP
1140	720	870	•		3 x 150 mm, left	01.317.375.1	1 unit
1710	720	870	•		3 x 150 mm, left	01.317.379.1	1 unit
1140	750	870	•		3 x 150 mm, left	01.317.875.1	1 unit
1710	750	870	•		3 x 150 mm, left	01.317.879.1	1 unit
1140	750	870			3 x 150 mm, left	01.317.859.1	1 unit
1710	750	870			3 x 150 mm, left	01.317.863.1	1 unit




DAC20142

W	H	D	CRS	ESD	Pedestal / For add-on	Order no.	UP
1140	720	870	•		3 x 150 mm, right	01.317.374.1	1 unit
1710	720	870	•		3 x 150 mm, right	01.317.378.1	1 unit
1140	750	870	•		3 x 150 mm, right	01.317.874.1	1 unit
1710	750	870	•		3 x 150 mm, right	01.317.878.1	1 unit
1140	750	870			3 x 150 mm, right	01.317.858.1	1 unit
1710	750	870			3 x 150 mm, right	01.317.862.1	1 unit




DAC20143

W	H	D	CRS	ESD	Pedestal / For add-on	Order no.	UP
1140	720	870	•		150 + 300 mm, left	01.317.377.1	1 unit
1710	720	870	•		150 + 300 mm, left	01.317.381.1	1 unit
1140	750	870	•		150 + 300 mm, left	01.317.877.1	1 unit
1710	750	870	•		150 + 300 mm, left	01.317.881.1	1 unit
1140	750	870			150 + 300 mm, left	01.317.861.1	1 unit
1710	750	870			150 + 300 mm, left	01.317.865.1	1 unit



DAC20144

W	H	D	CRS	ESD	Pedestal / For add-on	Order no.	UP
1140	720	870	•		150 + 300 mm, right	01.317.376.1	1 unit
1710	720	870	•		150 + 300 mm, right	01.317.380.1	1 unit
1140	750	870	•		150 + 300 mm, right	01.317.876.1	1 unit
1710	750	870	•		150 + 300 mm, right	01.317.880.1	1 unit
1140	750	870			150 + 300 mm, right	01.317.860.1	1 unit
1710	750	870			150 + 300 mm, right	01.317.864.1	1 unit
1710	750	870		•	150 + 300 mm, right	01.363.864.1	1 unit



DAC20145

• Add-on desk

- Add-on desk, with 2 legs
- With or without lockable office pedestal

• Model

- With office pedestal
- Drawer height, 3 x 150 mm or 1 x 150 mm, 1 x 300 mm with suspension frame
- With 1 utility extension


Knürr Dacobas® Add-On Desk* With office pedestal, depth 800 mm

W	H	D	CRS	Pedestal / For add-on	Order no.	UP
1200	720	800	•	3 x 150 mm, left	01.319.175.1	1 unit
1600	720	800	•	3 x 150 mm, left	01.319.170.1	1 unit


W	H	D	CRS	Pedestal / For add-on	Order no.	UP
1200	720	800	•	3 x 150 mm, right	01.319.176.1	1 unit
1600	720	800	•	3 x 150 mm, right	01.319.171.1	1 unit

W	H	D	CRS	Pedestal / For add-on	Order no.	UP
1200	720	800	•	150 + 300 mm, left	01.319.177.1	1 unit
1600	720	800	•	150 + 300 mm, left	01.319.172.1	1 unit


W	H	D	CRS	Pedestal / For add-on	Order no.	UP
1200	720	800	•	150 + 300 mm, right	01.319.178.1	1 unit
1600	720	800	•	150 + 300 mm, right	01.319.173.1	1 unit

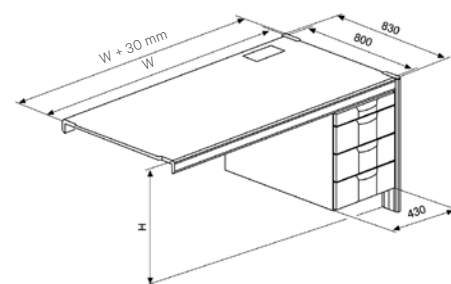


DAC00361




DAC20059



DAC20061



DAC20063



DAC20065


* Add-on desk:
Without extrusions in the link-up range

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length
HU = Standard height unit, 1 HU = 44.45 mm
19" = 482.6 mm, (ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging

Conversion: 1 inch = 25.4 mm
Replace „x“ with the number of your color choice

• Add-on desk

- Add-on desk with 2 legs
- With or without 19" pedestal, 536,6 mm in accordance with ICE 297
- Side panels removable
- Rear panel removable, with vent slots

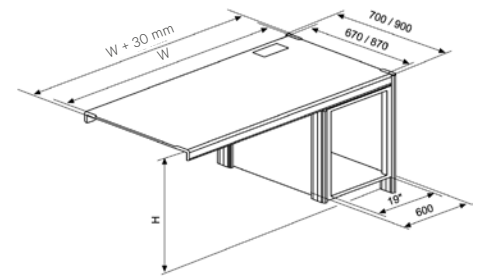


DAC00366

Knürr Dacobas® Add-On Desk*


With / without 19" office pedestal, depth 670 / 870 mm

W	H	D	CRS	Pedestal / For add-on	Order no.	UP
570	750	870	•	Without, left or right	01.300.377.1	1 unit
1140	750	870	•	Without, left or right	01.300.378.1	1 unit
1710	750	870	•	Without, left or right	01.300.380.1	1 unit




DAC20141

W	H	D	CRS	Pedestal / For add-on	Order no.	UP
1140	750	870	•	Left	01.304.335.1	1 unit
1710	750	870	•	Left	01.304.337.1	1 unit



DAC20146

W	H	D	CRS	Pedestal / For add-on	Order no.	UP
1140	750	870	•	Right	01.304.334.1	1 unit
1710	750	870	•	Right	01.304.336.1	1 unit



DAC20147



INFO

Recommended Accessoires:

- Corner Pieces p.144/145
- Rear Panels p.147

19" Desk Pedestal

	Variant I	Variant II
Rack depth / enclosure depth D (mm)	670 / 870	670 / 870
Chassis depth d (mm)	566,5 / 766,5	518 / 718

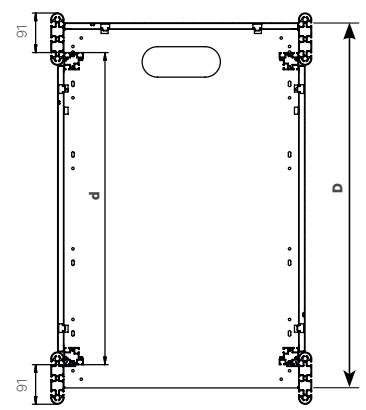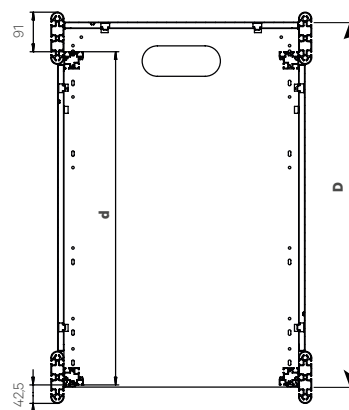

- **Mobile PC workstation with 4 legs**
- **Model**
 - With lockable office pedestal, left or right
 - Drawer height 1 x 150 mm, 1 x 300 mm with suspension frame
 - With utility extension
 - Removable desk extension, 200 mm
 - Second working level, load rating 300 N, static surface load
 - With foot frame
 - With 2x fixed and 2x swivel castors

Knürr Dacobas® Mobile PC Workstation

W	H	D	CRS	EDS	Pedestal	Order no.	UP
1140	720 / 1340	670			Left	01.317.040.1	1 unit

W	H	D	CRS	EDS	Pedestal	Order no.	UP
1140	720 / 1340	670			Right	01.317.041.1	1 unit

Knürr Dacobas® Triangle Corner, 90° With corner frame and mounting material


- 90° Triangle corner with corner frame and mounting material

A	B	Order no.	UP
870	870	01.300.050.1	1 unit


Knürr Dacobas® Triangle Corner, 60° With corner frame and mounting material

- 60° Triangle corner with corner frame and mounting material


A	B	Order no.	UP
870	870	01.300.059.1	1 unit

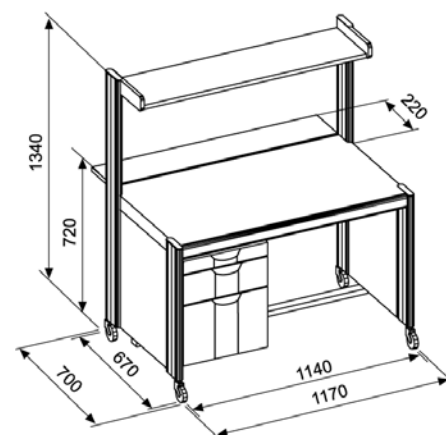


DAC00342




DAC00342



DAC20078



DAC00499



DAC00372

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44,45 mm
19" = 482,6 mm, (ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging


Conversion: 1 inch = 25,4 mm

Replace „x“ with the number of your color choice

Knürr Dacobas® Triangle Corner, 45° With corner frame and mounting material

- 45° Triangle corner with corner frame and mounting material

A	B	ESD	Order no.	UP
870	870		01.300.045.1	1 unit
870	870	•	01.360.045.1	1 unit




DAC2017

Knürr Dacobas® Wall Corner With corner frame, desk leg and mounting material

- Wall corner with corner frame, desk leg and mounting material

H	A	B	ESD	Order no.	UP
720	870	870		01.300.031.1	1 unit
720	670	870		01.300.033.1	1 unit
720	870	670		01.300.032.1	1 unit
720	670	670		01.300.030.1	1 unit
750	870	870	•	01.360.035.1	1 unit




DAC00374

Knürr Dacobas® Trapezoid Corner With corner frame, desk leg and mounting material

- Trapezoid corner with corner frame, 2 desk legs and mounting material

H	A	B	C	D	CRS	ESD	Order no.	UP
720	870	610	1317	870	•		01.300.137.1	1 unit
750	870	610	1317	870	•		01.300.141.1	1 unit
750	670	610	1117	729	•		01.300.143.1	1 unit
750	870	610	1317	870		•	01.360.140.1	1 unit




DAC00496

Knürr Dacobas® Trapezoid Wall Corner With corner frame, desk leg and mounting material

- Trapezoid wall corner with corner frame, 1 desk leg and mounting material

H	A	B	C	CRS	Order no.	UP
720	870	610	1317	•	01.300.123.1	1 unit
750	870	610	1317	•	01.300.127.1	1 unit

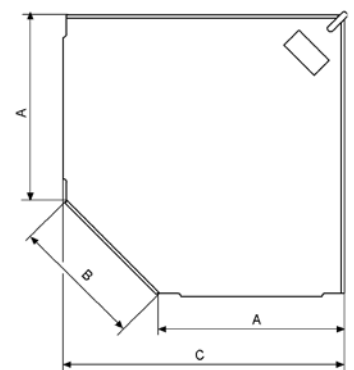

DAC00495

Knürr Dacobas® Extrusion

- Aluminium extrusion with 3 T-slots on each side
- For extrusion extension
- For mounting vertical cable duct, lights, Rapomos®, mini distributors, flat screens and functional rails
- Material / Finish**
 - Extrusion: extruded aluminium, powder-coated texture
- Color**
 - Extrusions: RAL 5008, grey-blue
 - Caps: RAL 5008 grey-blue and RAL 9011, graphite black (for ESD)
- Supply schedule**
 - 2 extrusions
 - 1 mounting instructions
 - Mounting material
- How supplied**
 - Single unit



EAP20007

L	Order no.	UP
450	01.321.105.1	1 pair
890	01.321.106.1	1 pair
830	01.321.107.1	1 pair

Storage Tray Tilt adjustable

- To set down instruments and organisational material
- Ergonomic positioning with tilt adjustment of +/- 5°
- Mounting between the Knürr Dacobas® extrusions
- Height adjustable on the vertical Knürr Dacobas® extrusions
- Also for mounting above the underfit lamp
- Material / Finish**
 - Storage tray: sheet steel, antistatic powder-coated texture, RAL 7035 light-grey
- Supply schedule**
 - 1 storage tray
 - Mounting material
- Note**
 - From width 1630 mm with additional strength
- Load rating**
 - 750 N (static surface load)



EAP20023

W	H	D	Model	Order no.	UP
830		400	Knürr Dacobas®	01.321.320.1	1 unit
1030		400	Knürr Dacobas®	01.321.321.1	1 unit
1230		400	Knürr Dacobas®	01.321.322.1	1 unit
1430		400	Knürr Dacobas®	01.321.323.1	1 unit
1630		400	Knürr Dacobas®	01.321.324.1	1 unit
1830		400	Knürr Dacobas®	01.321.325.1	1 unit
2030		400	Knürr Dacobas®	01.321.326.1	1 unit

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

Conversion: 1 inch = 25.4 mm

OU = Office unit (50 mm)
HU = Standard height unit, 1 HU = 44.45 mm
19" = 482.6 mm.
(ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging

Replace „x“ with the number of your color choice

Knürr Dacobas® Desk Rear Panel

- Modesty panel
- For Knürr Dacobas® desks with and without 19" pedestals or with and without office pedestals
- **Standards**
 - DIN 68761 for cover
- **Material / Finish**
 - Mounting bracket, sheet steel, powder-coated texture
 - Cover: three layer particle board, FP / Y E1 version, fire protection class B2

- **Color**
Retaining extrusions:
 - RAL 9011 graphite black
 - Wooden parts: light-grey
- **Supply schedule**
 - 2 Mounting brackets
 - 1 Rear panel
 - Mounting material
- **How supplied**
 - Flat packed in modules

W	H	D	Order no.	UP
540	580	570	01.301.555.1	1 unit
1110	580	1140	01.301.556.1	1 unit
1680	580	1710	01.301.557.1	1 unit



EAP20020

Knürr Dacobas® Desk Side Panels with Retaining Extrusions For desk height, 750 mm

W	H	D	Order no.	UP
	580	670	01.302.419.1	1 unit
	580	870	01.302.417.1	1 unit




EAP20019

Knürr Dacobas® Leg Set for Add-on Desks For connecting 3-way desk combinations

- **Material / Finish**
 - Desk leg, extruded aluminium, powder-coated texture
- **Color**
 - RAL 5008, grey blue
- **Supply schedule**
 - 1 Desk leg, L 695 mm with levelling screw and caps
 - 1 Link-up extrusion, L 67 mm with caps
- **How supplied**
 - Flat-packed kit

W	H	D	Order no.	UP
	720		01.300.078.1	1 unit
	750		01.300.079.1	1 unit



DAC00356

Knürr Dacobas® Computer Mounting Bracket

- Can be mounted left, right or both sides on the vertical extrusion at any height
- Width adjustable from 165 mm to 265 mm

Material / Finish

- Sheet steel, conductive powder-coated texture, RAL 7035 light-grey

Load rating

- 250 N (static surface load)

Note

- The lowest mounting position should be 80 mm (min. floor clearance)

Supply schedule

- 1 computer support
- Mounting material

How supplied

- Flat-packed kit

W	H	D	Order no.	UP
165 - 265	319	463	04.208.078.1	1 unit



EAP20025

Knürr Dacobas® PC Pedestal, sheet steel model

PC Pedestal

- PC pedestal with front and rear door, lockable
- With extension and master switch
- With cable entry


Dimensions

Useful space with extension:

- Width = 300 mm, height = 542 mm
- Without extension: Width = 300 mm, height = 590 mm

For mounting on Knürr Dacobas® add-on desks*

D	Pedestal	Order no.	UP
870	Left	01.302.218.1	1 unit
800	Left	01.311.308.1	1 unit
870	Right	01.302.219.1	1 unit
800	Right	01.311.309.1	1 unit

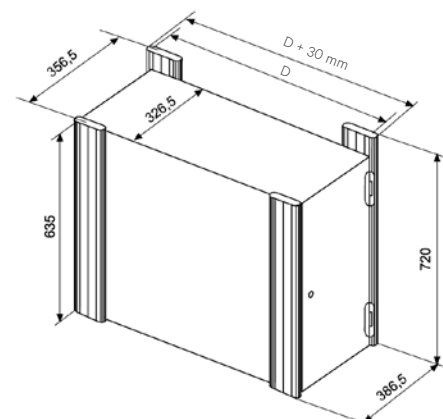

DAC00341

Knürr Dacobas® PC Pedestal

- Bonded main unit
- With passive ventilation *
- Full glass doors and lock at the front
- Stationary with leveling feet
- With cable routing set at the rear top for cabling in the vertical cable duct

Material / finish

- Main unit: Three layer particle board FP/Y E 1 version, directly coated, fire protection class B2
- Front doors: Full glass doors, EMC, 6 mm, clear glass

Color combination

Final digit of order number 1:

- Main unit: Light gray
- Door: Full glass door, EMC, 6 mm, clear glass

Supply schedule

- 1 PC pedestal
- Mounting material

How supplied

- Preassembled

W	H	D	w	h	d	Model	Order no.	UP
350	680	826	310	630	780	Mounting left, Lock for H 750, right	00.320.540.1	1 unit
350	680	826	310	630	780	Mounting right, Lock for H 750, left	00.320.541.1	1 unit
350	650	826	310	600	780	Mounting left, Lock for H 720, right	00.320.542.1	1 unit
350	650	826	310	600	780	Mounting right, Lock for H 720, left	00.320.543.1	1 unit



DAC20183

SERVICE & MAINTENANCE

ESSENTIAL



SCOPE OF SERVICES:

- **24/7 service hotline** – available at all times for rapid support from our experts
- **Reliable fault rectification** – service call-out within a maximum of 10 working days
- **Replacement parts included** – no additional material costs in the event of a fault

Knürr® Service – ESSENTIAL

Description	Order-nr.
ESSENTIAL Service 24 months (2Y)	94.000.024.0
ESSENTIAL Service 36 months (3Y)	94.000.036.0
ESSENTIAL Service 48 months (4Y)	94.000.048.0
ESSENTIAL Service 60 months (5Y)	94.000.060.0

Knürr® proactive on-site maintenance

Description	Order-nr.
Maintenance	94.001.000.0
Maintenance with DGUV/V3	94.001.000.0000001
Maintenance with Thermoscan	94.001.000.0000002

PREMIUM



SCOPE OF SERVICES:

- **24/7 service hotline** – available at all times for rapid support from our experts
- **Reliable fault rectification** – service call-out within a maximum of 5 working days
- **Replacement parts included** – no additional material costs in the event of a fault
- **On-site repairs included** – travel costs and labour costs are already included in the service package

Knürr® Service – PREMIUM

Description	Order-nr.
PREMIUM Service 24 months (2Y)	94.000.024.1
PREMIUM Service 36 months (3Y)	94.000.036.1
PREMIUM Service 48 months (4Y)	94.000.048.1
PREMIUM Service 60 months (5Y)	94.000.060.1
PREMIUM Service 72 months (6Y)	94.000.072.1
PREMIUM Service 84 months (7Y)	94.000.084.1
PREMIUM Service 96 months (8Y)	94.000.096.1
PREMIUM Service 108 months (9Y)	94.000.108.1
PREMIUM Service 120 months (10Y)	94.000.120.1

*In accordance with Knürr service terms and conditions

Ergonomically designed products and solutions from a single source

Knürr GmbH is one of the world's leading specialists for innovative solutions in safety- and performance-critical control centres and command rooms. For more than 50 years, the company, headquartered in Germany, has been delivering tailor-made and fully integrated workspace systems designed for demanding 24/7 operations.

Learn more about Knürr solutions and services at
www.knuerr.com

Knürr GmbH
 Mariakirchener Straße 38
 94424 Arnstorf
 Germany
 T +49 8723 28 0
 F +49 8723 28 138
info@knuerr.com
www.knuerr.com



knürr
World of control rooms