



**knürr**  
World of control rooms

# CONTROL ROOM SOLUTIONS BOOK

2026 / EN-V1

# KNÜRR ELICON® VC / VC-E

51 to 62



## MODULAR WORKSTATION SYSTEM

Whether for video surveillance, security dispatching or engineering workstations – our comprehensive product range offers optimal **solutions for a customized, ergonomic and efficient workstation.**

The **modular design** enables a wide variety of configurations and guarantees the highest degrees of flexibility. Combinations of tables can be retrofitted or modified at any time and without considerable effort.

**High quality materials** with extruded aluminum profiles in combination with die-cast aluminum stabilizers ensure a **maximum degree of stability and sturdiness.**

**Ergonomic details** simplify daily work in various situations and environments.

A **comprehensive range of accessories** completes the Knürr Elicon workstation system: flat screen holders, PC and 19-inch rack containers, workstation lighting, usable storage trays, cable routing ducts and other extras.

## Knürr Elicon® VC-E

Electrical height adjustable Sit-Stand Workstation

### Intelligent cable routing

Covered vertical cable routing in the side section, accessible from the inside and outside

### High quality tabletops

with depths of 800 mm and 900 mm, linear or curved variants



### Modular console system

Frame widths from 1200 mm to 2000 mm

### In compliance with standards

Certified usability and ergonomics based on DIN 33419 / EN ISO 15537 and DIN EN 527-1.

### Maximum stability

Extruded aluminium profile with steel bracket for maximum stability.

**Standard colors:**



**A** RAL7035  
Light gray




**B** Nelson Oak  
wood grain

**Modern design and color scheme**

Base frame in RAL 9006 white aluminium, tabletop either in RAL 7035 light gray or Nelson Oak wood grain

**Simple screen integration**

High degree of flexibility thanks to adjustable jointed screen arms

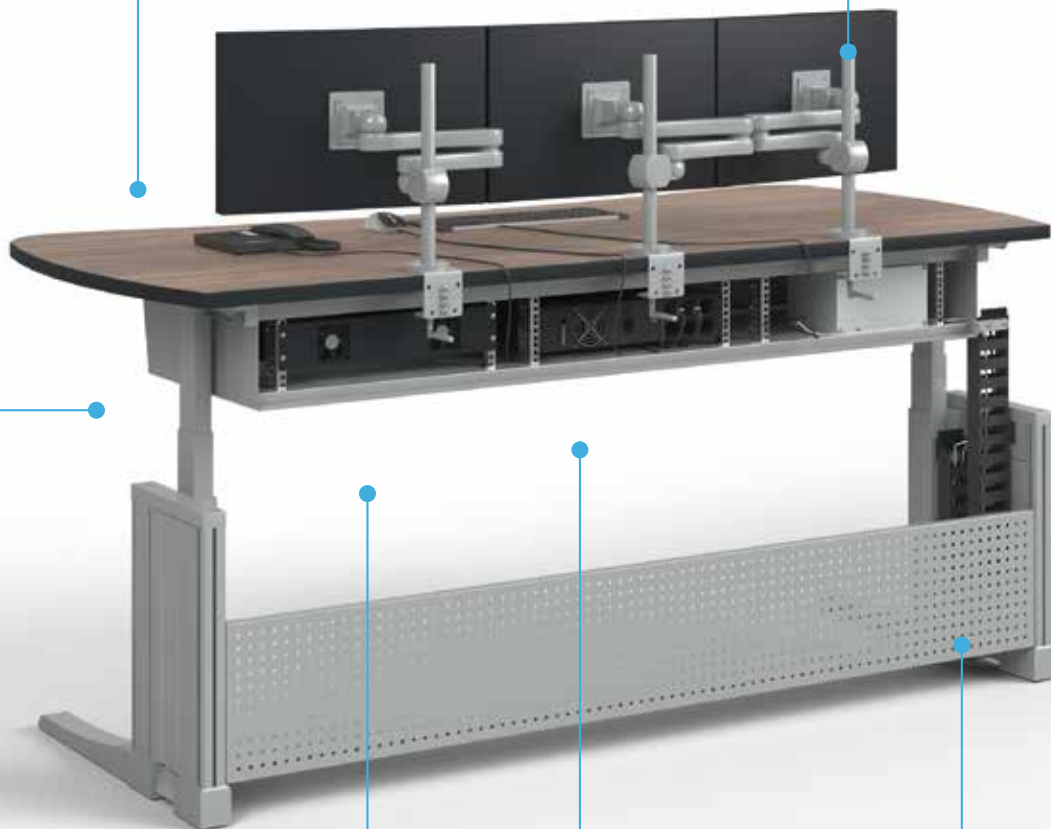

**Comfortable height adjustment**

Electric height adjustment from 650 to 1250 mm

**Flat packaging**

for reduced transport volume

**Large KVM-ready technology module**

with up to 3x3U 19" installation for simple and reliable installation of KVMs, socket strips, switches, etc.

**Sturdy rear panel**

to ensure optimal lateral stability and function as a privacy screen

## Knürr Elicon® VC

Height adjustable (VC), in combination with electric height adjustment (VC-E)

**Knürr Elicon VC-E Module**  
(Linear)

**Knürr Elicon VC Module**  
(Linear and 90° corner)



**Simple chain-linking**  
of electrically adjustable (VC-E)  
and height selectable (VC) con-  
soles



**Height adjustable**  
in 20 mm increments from  
640 to 760 mm

**Standard colors:**



**A** RAL7035  
Light gray



**B** Nelson Oak  
wood grain

### **Future-proof modular design**

Expand your existing table combinations, modify your current installation or supplement it with new accessories. The modular design and multi-functional T-grooves give you all the options for future upgrades.

### **Easy assembly**

Quick and easy to assemble on site



### **Intelligent cable routing**

Covered vertical cable routing in the side section, accessible from the inside and outside

### **Optional rear panels**

for VC consoles guarantee a uniform design

### **Roomy cable troughs**

Full accessibility, including optional privacy protection using front covers and plug-in rear panel

### **High quality energy chain**

for safe and convenient routing from the VC-E side section to the cable trough

## Knürr Elicon® VC-E Side Sections Electric height adjustment

- Height adjustment range: 650 mm to 1250 mm
- Only usable in combination with Elicon VC-E Working Surfaces
- **Material / Finish**
  - Extruded aluminium profile with steel bracket and head piece
  - Steel panel covers, powder-coated
- **Color**
  - RAL9006 White aluminium
- **Supply schedule**
  - Left-hand and right-hand variants: 1 side section with lifting column, lifting column and cable duct covers
  - Center variant: 1 side section with 2 lifting columns, lifting column and cable duct covers
- **How supplied**
  - Completely preassembled

H	D	Model	Order-No	UP
590	800	Side section, left	04.265.130.7	1 unit
590	800	Side section, right	04.265.131.7	1 unit
590	800	Side section, center	04.265.132.7	1 unit



Side section, left

CON20115

Side section, right

CON20116




Side section, center

CON20117

## Maximum stability guaranteed!

Custom linking options between **VC-E** and **VC** modules

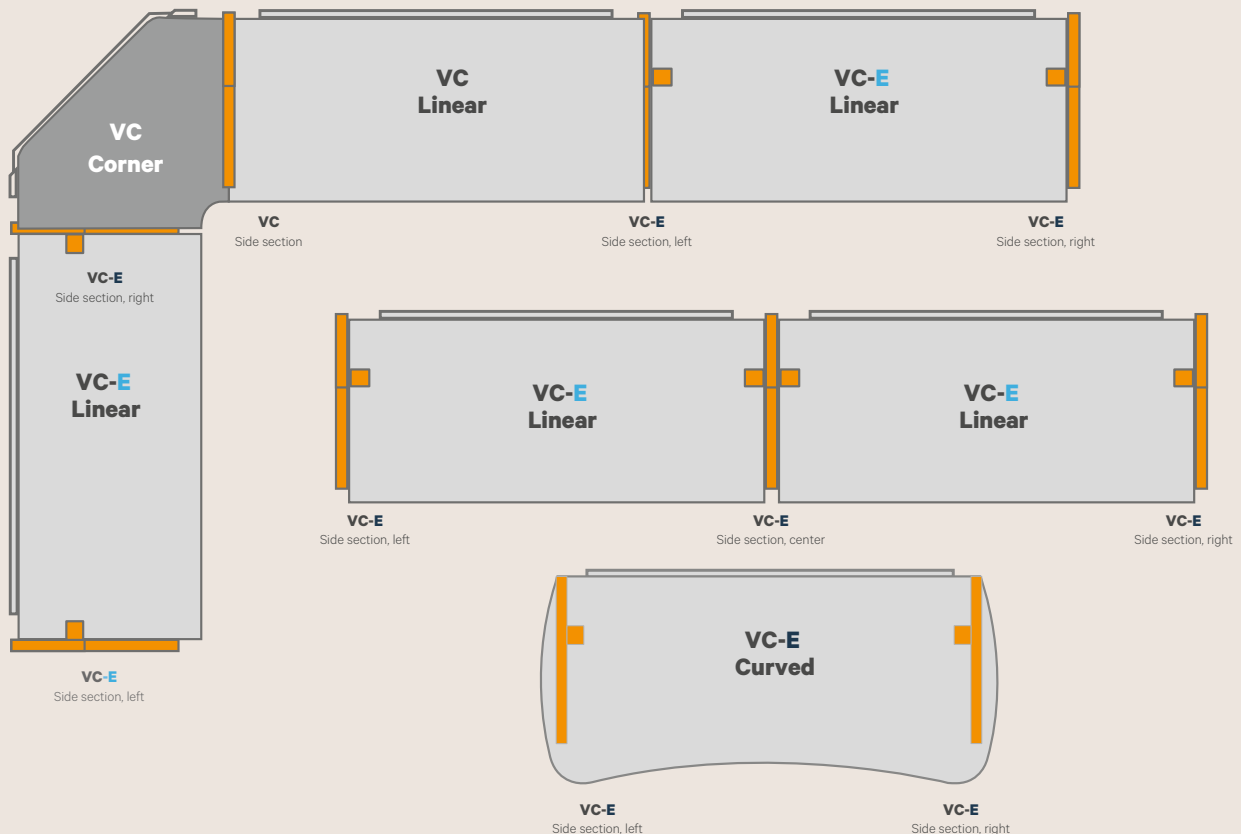

## Knürr Elicon® VC-E Working Surfaces Curved


- Single table
- Height adjustment range: 650 mm to 1250 mm
- Only usable in combination with Elicon VC-E Side Sections
- **Loading capacity**
  - 1200 N (static surface load)
- **Material / Finish**
  - Tabletop: Three-layer particle board FP/Y E1 variant, fire protection class B2
  - Tabletop cover: High pressure plastic laminate (HPL)
  - Edging: ABS
  - Stabilizer, cable trough and rear panel Steel panel, powder-coated
- **Color combination**
  - Tabletop:
    - .A RAL7035 Light gray or
    - .B Nelson Oak wood grain
  - Edging: Black gray
  - Sheet metal parts: RAL9006 White aluminium
- **Supply schedule**
  - 1 working surface with KVM technology module and 19" profiles
  - 1 control unit for electrical height adjustment
  - 1 energy chain
  - 1 rear panel, bottom
- **How supplied**
  - Preassembled, flat packaging

W	D	Model	Order-no.	UP
1400	800	Curved	04.265.023.x	1 unit
1600	800	Curved	04.265.024.x	1 unit
1800	800	Curved	04.265.025.x	1 unit
2000	800	Curved	04.265.026.x	1 unit
2200	800	Curved	04.265.027.x	1 unit

1400	900	Curved	04.265.033.x	1 unit
1600	900	Curved	04.265.034.x	1 unit
1800	900	Curved	04.265.035.x	1 unit
2000	900	Curved	04.265.036.x	1 unit
2200	900	Curved	04.265.037.x	1 unit



CON20118

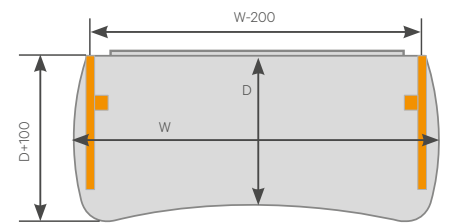

CON20119

## Knürr Elicon® VC-E Working Surfaces Linear


- Single table or linked
- Height adjustment range: 650 mm to 1250 mm
- Only usable in combination with Elicon VC-E Side Sections
- **Loading capacity**
  - 1200 N (static surface load)
- **Material / Finish**
  - Tabletop: Three-layer particle board FP/Y E1 variant, fire protection class B2
  - Tabletop cover: High pressure plastic laminate (HPL)
  - Edging: ABS
  - Stabilizer, cable trough and rearpanel Steel panel, powder-coated
- **Color combination**
  - Tabletop:
    - .A RAL7035 Light gray or
    - .B Nelson Oak wood grain
  - Edging: Black gray
  - Sheet metal parts: RAL9006 White aluminium
- **Supply schedule**
  - 1 working surface with KVM technology module and 19" profiles
  - 1 control unit for electrical height adjustment
  - 1 energy chain
  - 1 rear panel, bottom
- **How supplied**
  - Preassembled, flat packaging

W	D	w	Model	Order-no.	UP
1200	800	1142	Linear	04.265.003.x	1 unit
1400	800	1342	Linear	04.265.004.x	1 unit
1600	800	1542	Linear	04.265.005.x	1 unit
1800	800	1742	Linear	04.265.006.x	1 unit
2000	800	1942	Linear	04.265.007.x	1 unit

1200	900	1142	Linear	04.265.013.x	1 unit
1400	900	1342	Linear	04.265.014.x	1 unit
1600	900	1542	Linear	04.265.015.x	1 unit
1800	900	1742	Linear	04.265.016.x	1 unit
2000	900	1942	Linear	04.265.017.x	1 unit



CON20120

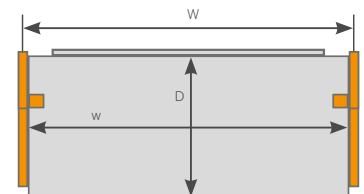

CON20121

**Dimensions in mm:** W = Width  
H = Height  
D = Depth  
h = Installation height  
d = Useful depth  
L = Length

HU = Standard height unit, 1 HU = 44,45 mm  
19" = 482,6 mm, (ideal for 19" components in acc. with DIN 41494)  
UP = Unit of packaging  
kg = Weight

**Conversion:** 1 inch = 25,4 mm  
1 pound = 453,6 g

Replace „x“ with the number of your color choice

## Knürr Elicon® VC Side Section Height-selectable

- Height-selectable in 20 mm increments from 640 to 760 mm
- Only usable in combination with Elicon VC Working Surfaces
- **Material / Finish**
  - Extruded aluminium profile with steel bracket and head piece
  - Steel panel covers, powder-coated
- **Color**
  - RAL9006 White aluminium
- **Supply schedule**
  - 1 side section with cable duct covers
- **How supplied**
  - Completely preassembled

W	D	Model	Order-no.	UP
500	800	Side section	04.265.120.7	1 unit



CON20123

## Knürr Elicon® VC Working Surfaces Linear


- Single table or linked
- Height-selectable in 20 mm increments from 640 to 760 mm
- Only usable in combination with Elicon VC Side Sections
- **Loading capacity**
  - 1200 N (static surface load)
- **Material / Finish**
  - Tabletop: Three-layer particle board FP/Y E1 variant, fire protection class B2
  - Tabletop cover: High pressure plastic laminate (HPL)
  - Edging: ABS
  - Stabilizer, cable trough, powder-coated
- **Color combination**
  - Tabletop:
    - .A RAL7035 Light gray or
    - .B Nelson Oak wood grain
  - Edging: Black gray
  - Sheet metal parts: RAL9006 White aluminium
- **Supply schedule**
  - 1 working surface with KVM technology module and 19" profiles
- **How supplied**
  - Preassembled, flat packaging

W	D	MODEL	Order-no.	UP
1200	800	Linear	04.265.103.x	1 unit
1400	800	Linear	04.265.104.x	1 unit
1600	800	Linear	04.265.105.x	1 unit
1800	800	Linear	04.265.106.x	1 unit
2000	800	Linear	04.265.107.x	1 unit

1200	900	Linear	04.265.113.x	1 unit
1400	900	Linear	04.265.114.x	1 unit
1600	900	Linear	04.265.115.x	1 unit
1800	900	Linear	04.265.116.x	1 unit
2000	900	Linear	04.265.117.x	1 unit



CON20120

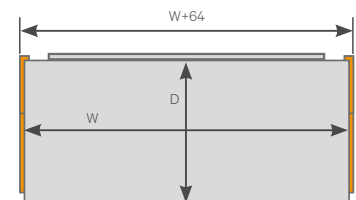


Please order the rear panel for foot areas separately for Elicon VC Working Surfaces!

**Dimensions in mm:** W = Width  
H = Height  
D = Depth  
h = Installation height  
d = Useful depth  
L = Length  
HU = Standard height unit, 1 HU = 44,45 mm  
19" = 482,6 mm, (ideal for 19" components in acc. with DIN 41494)  
UP = Unit of packaging  
kg = Weight


**Conversion:** 1 inch = 25,4 mm  
1 pound = 453,6 g  
Replace „x“ with the number of your color choice

## Knürr Elicon® VC Working Surfaces Corners

- Height-selectable in 20 mm increments from 640 to 760 mm
- Only usable in combination with Elicon VC Side Sections
- **Loading capacity**
  - 1200 N (static surface load)
- **Material / Finish**
  - Tabletop: Three-layer particle board FP/Y E1 variant, fire protection class B2
  - Tabletop cover: High pressure plastic laminate (HPL)
  - Edging: ABS
  - Stabilizer, cable trough and rear panel Steel panel, powder-coated
- **Color combination**
  - Tabletop:
    - .A RAL7035 Light gray or
    - .B Nelson Oak wood grain
  - Edging: Black gray
  - Sheet metal parts: RAL9006 White aluminium
- **Supply schedule**
  - 1 working surface with horizontal cable duct
- **How supplied**
  - Preassembled, flat packaging

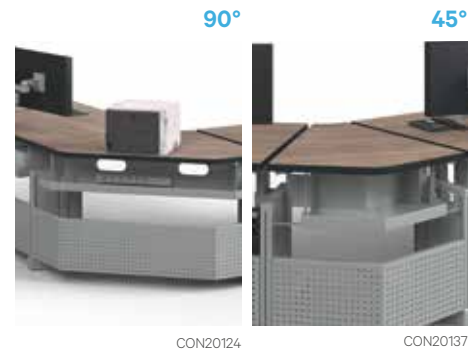


D	Model	Order-no.	UP
800	90° corner	04.265.140.x	1 unit
800	90° wall corner	04.265.141.x	1 unit
900	90° corner	04.265.142.x	1 unit
900	90° wall corner	04.265.143.x	1 unit
800	45° corner	04.265.144.x	1 unit
900	45° corner	04.265.145.x	1 unit

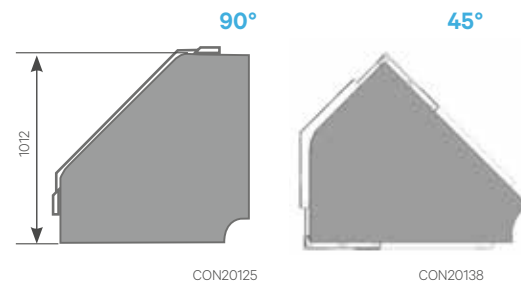

## Knürr Elicon® VC Rear Panels Leg area

- **Material / Finish**
  - Steel panel, powder-coated
- **Color**
  - RAL9006 White aluminium
- **Supply schedule**
  - 1 rear panel with mounting material
- **How supplied**
  - Flat-packed kit

W	H	Model	Order-no.	UP
1200	300	Straight	04.265.153.7	1 unit
1400	300	Straight	04.265.154.7	1 unit
1600	300	Straight	04.265.155.7	1 unit
1800	300	Straight	04.265.156.7	1 unit
2000	300	Straight	04.265.157.7	1 unit
	300	90° corner	04.265.160.7	1 unit
	300	45° corner	04.265.159.7	1 unit

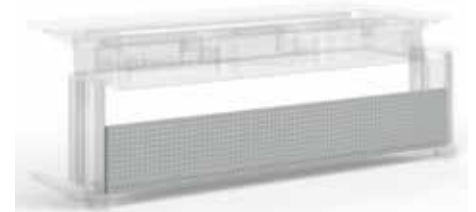

## Technical Container

- Technical container for rear mounting on the Elicon VC/E system table.
- With removable perforated sheet metal cladding and cable entry options on both sides.
- Cables can be guided from the raised floor into the container and via cable chains towards the working level.
- **Usable dimensions**
  - Clear depth: 200 mm
  - Clear height: 550 mm
- **Material / Finish**
  - Body: Three-layer particle board
  - Sheet metal parts: RAL9006 White aluminium



W	Order-no.	UP
1200	04.265.243.7	1 unit
1400	04.265.244.7	1 unit
1600	04.265.245.7	1 unit.
1800	04.265.246.7	1 unit
2000	04.265.247.7	1 unit


## Knürr Elicon® VC/VC-E Cover Set for cable duct

- **Material / Finish**
  - Steel panel, powder-coated
- **Color**
  - RAL9006 White aluminium
- **Supply schedule**
  - 1 rear panel
  - Mounting material

W	H	Model	Order-no.	UP
1200	200	Straight	04.265.163.7	1 unit
1400	200	Straight	04.265.164.7	1 unit
1600	200	Straight	04.265.165.7	1 unit
1800	200	Straight	04.265.166.7	1 unit
2000	200	Straight	04.265.167.7	1 unit
	200	90° corner	04.265.170.7	1 unit
	200	45° corner	04.265.174.7	1 unit



CON20127



Sectional drawing of cable trough

## Knürr Elicon® Computer Mount Lateral

- Left-hand, right-hand or dual mounting on vertical profile (both inside and outside) at any height
- WIDTH adjustable (165 to 265 mm)
- **Material / Finish**
  - Steel panel, anti-static, powder-coated structure.
- **Color**
  - RAL 9006 White aluminium
- **Loading capacity**
  - 250 N (static surface load)
- **Note**
  - The lowest mounting position corresponds to 80 mm (minimum ground clearance)
- **Supply schedule**
  - 1 computer support
  - Mounting material
- **How supplied**
  - Flat-packed kit

W	H	D	Order-no.	UP
			04.208.078.7	1 unit



CON20129

## Knürr Elicon® VC/VC-E Adapter Bracket for PC Mount

- Required in addition to computer mount 04.208.078.7 for front-side mounting!
- **Color**
  - RAL 9006 White aluminium

Model	Order-no.	UP
For front-side mounting	04.265.179.7	1 unit



CON20130



Suitable monitor mounting accessories can be found from page 245

**Dimensions in mm:** W = Width  
H = Height  
D = Depth  
h = Installation height  
d = Useful depth  
L = Length  
HU = Standard height unit, 1 HU = 44.45 mm  
19" = 482.6 mm, (ideal for 19" components in acc. with DIN 41494)  
UP = Unit of packaging  
kg = Weight  
**Conversion:** 1 inch = 25.4 mm  
1 pound = 453.6 g  
Replace 'x' with the number of your color choice



## Knürr Elicon® VC/VC-E - Horizontal cable duct

- Set with 2 cable trays for separate cable routing.
  - Optimised for transverse cabling, e.g. when set up in rows or if there is no raised floor.
  - Flexible positioning and easy assembly by hooking in the cable trays.
- **Material / Finish**
    - Galvanised steel,
    - Sheet steel powder coated
  - **Supply schedule**
    - 2 horizontal cable trays
    - 2 mounting brackets with suspension lugs
    - Mounting material
  - **How supplied**
    - as a set

\* with Elicon® VC additionally requires the back panel in the foot area



Model	Order-no.	UP
Cable duct set horizontal W1200	04.265.253.7	1 unit
Cable duct set horizontal W1400	04.265.254.7	1 unit
Cable duct set horizontal W1600	04.265.255.7	1 unit
Cable duct set horizontal W1800	04.265.256.7	1 unit
Cable duct set horizontal W2000	04.265.257.7	1 unit

## VC / VC-E monitor levels


- Optionally as height-fixed or electrically height-adjustable version (150mm adjustment range)
  - With stable screw connection and additional clamping on the table top
  - With functional and stable IM TFT rail and horizontal cable guide
  - Single-sided energy chain for safe vertical cable routing
- **Color**
    - RAL 9006 White aluminium
  - **Supply schedule**
    - 1 monitor level with fixing material
    - 1 set of horizontal cable guides
    - 1 energy chain

Additionally for electrically height-adjustable version:

    - 1 control electronics and 1 control panel
  - **How supplied**
    - In sets



Type	Version	Order-no.	UP
Monitor level 1200 H-fix 1 Level	Heightfix	04.265.273.7	1 unit
Monitor level 1400 H-fix 1 Level	Heightfix	04.265.274.7	1 unit
Monitor level 1600 H-fix 1 Level	Heightfix	04.265.275.7	1 unit
Monitor level 1800 H-fix 1 Level	Heightfix	04.265.276.7	1 unit
Monitor level 2000 H-fix 1 Level	Heightfix	04.265.277.7	1 unit
Monitor level 1200 H-fix 2 Levels	Heightfix	04.265.283.7	1 unit
Monitor level 1400 H-fix 2 Levels	Heightfix	04.265.284.7	1 unit
Monitor level 1600 H-fix 2 Levels	Heightfix	04.265.285.7	1 unit
Monitor level 1800 H-fix 2 Levels	Heightfix	04.265.286.7	1 unit
Monitor level 2000 H-fix 2 Levels	Heightfix	04.265.287.7	1 unit
Monitor level 1200 H-A 1 Level	Height-adjustable	04.265.263.7	1 unit
Monitor level 1400 H-A 1 Level	Height-adjustable	04.265.264.7	1 unit
Monitor level 1600 H-A 1 Level	Height-adjustable	04.265.265.7	1 unit
Monitor level 1800 H-A 1 Level	Height-adjustable	04.265.266.7	1 unit
Monitor level 2000 H-A 1 Level	Height-adjustable	04.265.267.7	1 unit

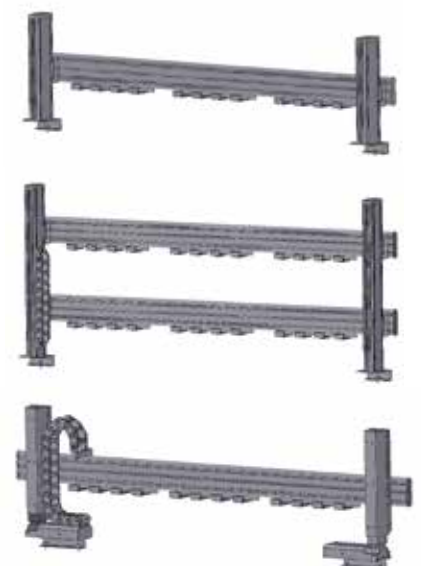

You will find the matching TFT holders on **page 42**.

# WARRANTY & MAINTENANCE PACKAGES

## ESSENTIAL



### SCOPE OF SERVICES:

- **24/7 service hotline** – available at all times for rapid support from our experts
- **Reliable fault rectification** – service call-out within a maximum of 10 working days
- **Replacement parts included** – no additional material costs in the event of a fault

### Knürr® Warranty – ESSENTIAL

Description	Order-nr.
Warranty 24 months (2Y)	94.000.024.0
Warranty 36 months (3Y)	94.000.036.0
Warranty 48 months (4Y)	94.000.048.0
Warranty 60 months (5Y)	94.000.060.0

### Knürr® proactive on-site maintenance

Description	Order-nr.
Maintenance	94.001.000.0
Maintenance with DGUV/V3	94.001.000.0000001
Maintenance with Thermoscan	94.001.000.0000002

\*In accordance with Knürr warranty terms and conditions

## PREMIUM



### SCOPE OF SERVICES:

- **24/7 service hotline** – available at all times for rapid support from our experts
- **Reliable fault rectification** – service call-out within a maximum of 5 working days
- **Replacement parts included** – no additional material costs in the event of a fault
- **On-site repairs included** – travel costs and labour costs are already included in the service package

### Knürr® Warranty – PREMIUM

Description	Order-nr.
Warranty 24 months (2Y)	94.000.024.1
Warranty 36 months (3Y)	94.000.036.1
Warranty 48 months (4Y)	94.000.048.1
Warranty 60 months (5Y)	94.000.060.1
Warranty 72 months (6Y)	94.000.072.1
Warranty 84 months (7Y)	94.000.084.1
Warranty 96 months (8Y)	94.000.096.1
Warranty 108 months (9Y)	94.000.108.1
Warranty 120 months (10Y)	94.000.120.1

## Ergonomically designed products and solutions from a single source

Knürr GmbH is one of the world's leading specialists for innovative solutions in safety- and performance-critical control centres and command rooms. For more than 50 years, the company, headquartered in Germany, has been delivering tailor-made and fully integrated workspace systems designed for demanding 24/7 operations.

Learn more about Knürr solutions and services at [www.knuerr.com](http://www.knuerr.com)

Knürr GmbH  
 Mariakirchener Straße 38  
 94424 Arnstorf  
 Germany  
 T +49 8723 28 0  
 F +49 8723 28 138  
 info@knuerr.com  
 www.knuerr.com



**knürr**  
World of control rooms

**knuerr.com** | **Knürr GmbH**, Mariakirchener Straße 38, 94424 Arnstorf, Germany ID-Nr. DE 363797731

© 2026 Knürr GmbH. All rights reserved. Knürr® and the Knürr logo are trademarks or registered trademarks of Knürr GmbH. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Knürr GmbH assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.

09.991.116.0.000001 • EN • #10065 Version 19.03.2026