



knürr
World of control rooms

CONTROL ROOM SOLUTIONS BOOK

2026 / EN-V1

KNÜRR® COMMAND TABLES FOR CRISIS ROOMS

95 to 100




Knürr® Command tables for crisis rooms

- Individually extendable monitor units with electric motors, also available with integrated keyboard drawers.
- Large-volume integrated technical base unit with lockable doors for optimum accessibility.
- Fully pre-installed cabling system for safe power distribution.
- With configurable socket modules.
- Design adapted to the control centre.
- Can be adapted to specific projects.

W	D	Version	Order-no.	UP
4000	2400	Knürr® Command tables for crisis rooms	04.267.000.x	1 unit

Central elements in fixed or motorised adjustable designs – prepared for technology integration such as displays and docking stations.

Available with front attachments or straight ends – suitable for any room layout and requirement.

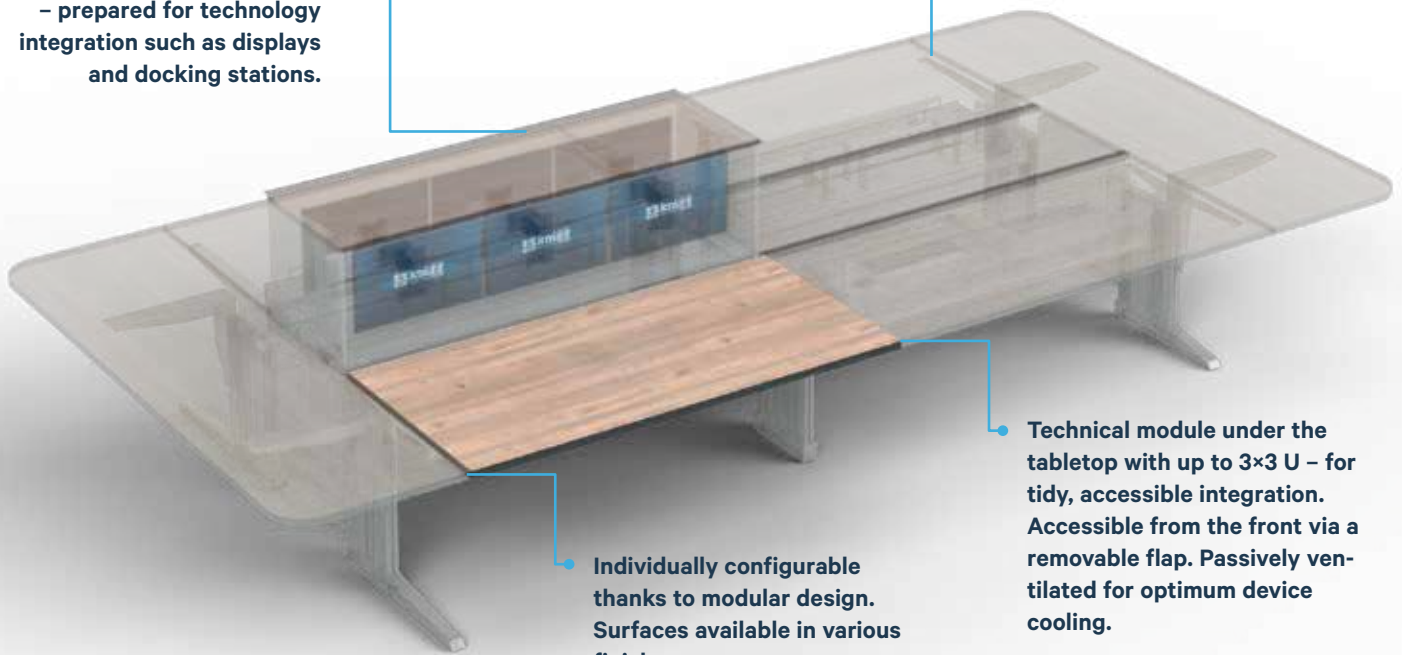


Individually configurable thanks to modular design. Surfaces available in various finishes.

Technical module under the tabletop with up to 3×3 U – for tidy, accessible integration. Accessible from the front via a removable flap. Passively ventilated for optimum device cooling.

Knürr Elicon® LT working levels


- Height adjustable in 20 mm increments from 720–760 mm.
- Only to be used in combination with Elicon LT side panels.
- **Loading capacity**
 - 1200N (static surface load)
- **Material / Finish**
 - Tabletop: Three-layer chipboard FP / Y E1, fire protection class B2.
 - Tabletop covering: High-pressure laminate (HPL).
 - Edging: ABS.
 - Cantilever, cable tray, powder-coated.
- **Color combination**
 - Tabletop:
 - .A RAL7035 light grey or
 - .B Nelson Oak wood decor
 - Edge banding: Black grey.
 - Metal parts:
 - RAL9006 white aluminium.
- **Supply schedule**
 - 1 working level KVM technology module and 19" profiles
- **How supplied**
 - Pre-assembled, flat packed

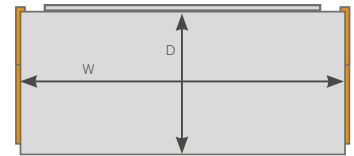

W	D	Order-no.	UP
1200	800	04.267.103.x	1 unit
1400	800	04.267.104.x	1 unit
1600	800	04.267.105.x	1 unit
1800	800	04.267.106.x	1 unit
2000	800	04.267.107.x	1 unit
1200	900	04.267.113.x	1 unit
1400	900	04.267.114.x	1 unit
1600	900	04.267.115.x	1 unit
1800	900	04.267.116.x	1 unit
2000	900	04.267.117.x	1 unit

Knürr Elicon® LT Side panels

- Height adjustable in 20 mm increments from 720–760 mm.
- Only to be used in combination with Elicon VC work surfaces.
- **Material / Finish**
 - Extruded aluminium profile with steel bracket and head piece.
 - Cladding parts made of powder-coated sheet steel.
- **Color**
 - RAL9006 White aluminium
- **Supply schedule**
 - 1 side panel with cable duct covers
- **How supplied**
 - Fully pre-assembled

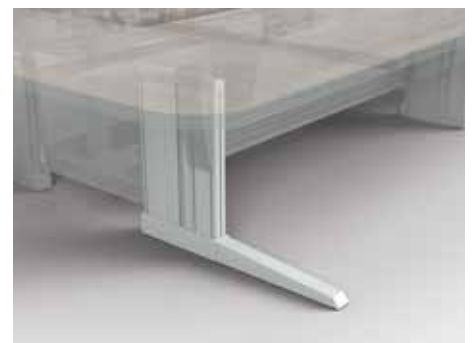

D	Version	Order-no.	UP
800	Elicon LT side panel with long arm	04.267.120.7	1 unit
600	Elicon LT side panel short arm	04.267.121.7	1 unit
330	Elicon LT side panel without extension arm	04.267.122.7	1 unit

Dimensions in mm: W = Width
 H = Height
 D = Depth
 h = Installation height
 d = Useful depth
 L = Length

HU = Standard height unit, 1 HU = 44.45 mm
 19" = 482.6 mm, (ideal for 19" components in acc. with DIN 41494)
 UP = Unit of packaging
 kg = Weight

Conversion: 1 inch = 25.4 mm
 1 pound = 453.6 g

Replace 'x' with the number of your color choice

Knürr Elicon® LT end element

- Height adjustable in 20 mm increments from 720–760 mm.
- Only to be used in combination with Elicon LT side panels.
- **Loading capacity**
 - 1200N (static surface load)
- **Material / Finish**
 - Tabletop: Three-layer chipboard FP / Y E1, fire protection class B2.
 - Tabletop covering: High-pressure laminate (HPL)
 - Edging: ABS
 - Cantilever, cable tray, powder-coated
- **Color combination**
 - Tabletop:
 - .A RAL7035 light grey or
 - .B Nelson Oak wood decor
 - Edge banding: Black grey
 - Metal parts: RAL9006 white aluminium
- **Supply schedule**
 - 1 working level
 - 1 front end panel
- **How supplied**
 - Pre-assembled, flat packed



W	D	Version	Order-no.	UP
2200	700	complete element	04.267.483.x	1 unit
2400	700	complete element	04.267.484.x	1 unit
		Front end panel (individual part)	04.267.493.7	1 unit

Knürr Elicon® LT Central Element FIX

- For installation in the central area of the positioning table
- **Material / Finish**
 - Tabletop: Three-layer chipboard FP / Y E1, fire protection class B2
 - Tabletop covering: High-pressure laminate (HPL)
 - Edging: ABS
- **Color combination**
 - Tabletop:
 - .A RAL7035 light grey or
 - .B Nelson Oak wood decor
 - Edge banding: Black grey
 - Metal parts: RAL9006 white aluminium
- **Supply schedule**
 - 1 Central element Fix
 - 1 Assembly kit
- **How supplied**
 - Vormontiert, flat packed



W	D	Version	Order-no.	UP
1200	600	fix	04.267.403.x	1 unit
1400	600	fix	04.267.404.x	1 unit
1600	600	fix	04.267.405.x	1 unit
1800	600	fix	04.267.406.x	1 unit
2000	600	fix	04.267.407.x	1 unit

Knürr Elicon® LT Central Element HV

- For installation in the central area of the situation table.
- Electrically extendable unit for integrating displays and accessories.
- **Material / Finish**
 - Tabletop: Three-layer chipboard
FP / Y E1, fire protection class B2
 - Tabletop covering: High-pressure laminate (HPL)
 - Edging: ABS
 - Metal parts, powder-coated
- **Color combination**
 - Tabletop:
 - .A RAL7035 light grey or
 - .B Nelson Oak wood decor
 - Edge banding: Black grey
 - Metal parts: RAL9006 white aluminium
- **Supply schedule**
 - 1 Central element HV
 - 1 Assembly kit
- **How supplied**
 - Pre-assembled, flat packed



W	D	Version	Order-no.	UP
1200	600	HV	04.267.413.x	1 unit
1400	600	HV	04.267.414.x	1 unit
1600	600	HV	04.267.415.x	1 unit
1800	600	HV	04.267.416.x	1 unit
2000	600	HV	04.267.417.x	1 unit

Knürr Elicon® LT rear panels Foot area

- **Material / Finish**
 - Powder-coated sheet steel
- **Color**
 - RAL9006 white aluminium
- **Supply schedule**
 - 1 Back panel with mounting hardware
- **How supplied**
 - In sets

W	D	Version	Order-no.	UP
1200	300	Straight	04.267.153.7	1 unit
1400	300	Straight	04.267.154.7	1 unit
1600	300	Straight	04.267.155.7	1 unit
1800	300	Straight	04.267.156.7	1 unit
2000	300	Straight	04.267.157.7	1 unit



Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44.45 mm
19" = 482.6 mm,
(ideal for 19" components in acc. with DIN 41494)

UP = Unit of packaging
kg = Weight

Conversion: 1 inch = 25.4 mm
1 pound = 453.6 g

Replace „x“ with the number of your color choice

Knürr Elicon® VC/VC-E – Horizontal cable duct

- Set of 2 cable trays for separate cable routing.
 - Optimised for cross-cabbling, e.g. when set up in rows or if there is no raised floor.
 - Flexible positioning and easy installation by hooking in the cable trays.
- **Material / Finish**
 - Galvanised steel, powder-coated sheet steel
 - **Supply schedule**
 - 2 horizontal cable trays
 - 2 mounting brackets with suspension lugs
 - Mounting hardware
 - **How supplied**
 - as a set

* Elicon® VC also requires a back panel in the foot area.



Version	Order-no.	UP
Horizontal cable duct set W1200	04.265.253.7	1 Stk.
Horizontal cable duct set W1400	04.265.254.7	1 Stk.
Horizontal cable duct set W1600	04.265.255.7	1 Stk.
Horizontal cable duct set W1800	04.265.256.7	1 Stk.
Horizontal cable duct set W2000	04.265.257.7	1 Stk.

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44.45 mm
19" = 482.6 mm,
(ideal for 19" components in acc. with DIN 41494)

UP = Unit of packaging
kg = Weight

Conversion: 1 inch = 25.4 mm
1 pound = 453.6 g

Replace „x“ with the number of your color choice

WARRANTY & MAINTENANCE PACKAGES

ESSENTIAL



SCOPE OF SERVICES:

- **24/7 service hotline** – available at all times for rapid support from our experts
- **Reliable fault rectification** – service call-out within a maximum of 10 working days
- **Replacement parts included** – no additional material costs in the event of a fault

Knürr® Warranty – ESSENTIAL

Description	Order-nr.
Warranty 24 months (2Y)	94.000.024.0
Warranty 36 months (3Y)	94.000.036.0
Warranty 48 months (4Y)	94.000.048.0
Warranty 60 months (5Y)	94.000.060.0

Knürr® proactive on-site maintenance

Description	Order-nr.
Maintenance	94.001.000.0
Maintenance with DGUV/V3	94.001.000.0000001
Maintenance with Thermoscan	94.001.000.0000002

*In accordance with Knürr warranty terms and conditions

PREMIUM



SCOPE OF SERVICES:

- **24/7 service hotline** – available at all times for rapid support from our experts
- **Reliable fault rectification** – service call-out within a maximum of 5 working days
- **Replacement parts included** – no additional material costs in the event of a fault
- **On-site repairs included** – travel costs and labour costs are already included in the service package

Knürr® Warranty – PREMIUM

Description	Order-nr.
Warranty 24 months (2Y)	94.000.024.1
Warranty 36 months (3Y)	94.000.036.1
Warranty 48 months (4Y)	94.000.048.1
Warranty 60 months (5Y)	94.000.060.1
Warranty 72 months (6Y)	94.000.072.1
Warranty 84 months (7Y)	94.000.084.1
Warranty 96 months (8Y)	94.000.096.1
Warranty 108 months (9Y)	94.000.108.1
Warranty 120 months (10Y)	94.000.120.1

Ergonomically designed products and solutions from a single source

Knürr GmbH is one of the world's leading specialists for innovative solutions in safety- and performance-critical control centres and command rooms. For more than 50 years, the company, headquartered in Germany, has been delivering tailor-made and fully integrated workspace systems designed for demanding 24/7 operations.

Learn more about Knürr solutions and services at www.knuerr.com

Knürr GmbH
 Mariakirchener Straße 38
 94424 Arnstorf
 Germany
 T +49 8723 28 0
 F +49 8723 28 138
 info@knuerr.com
 www.knuerr.com



knürr
World of control rooms

knuerr.com | **Knürr GmbH**, Mariakirchener Straße 38, 94424 Arnstorf, Germany ID-Nr. DE 363797731

© 2026 Knürr GmbH. All rights reserved. Knürr® and the Knürr logo are trademarks or registered trademarks of Knürr GmbH. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Knürr GmbH assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.

09.991.116.0.000001 • EN • #10065 Version 19.03.2026